

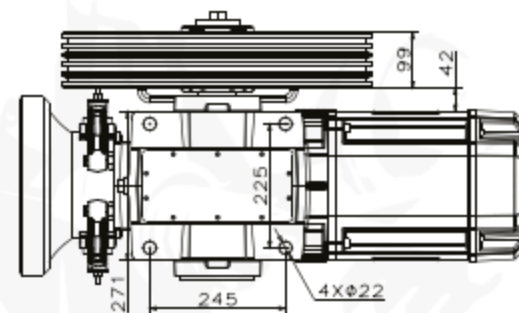


Dimensions

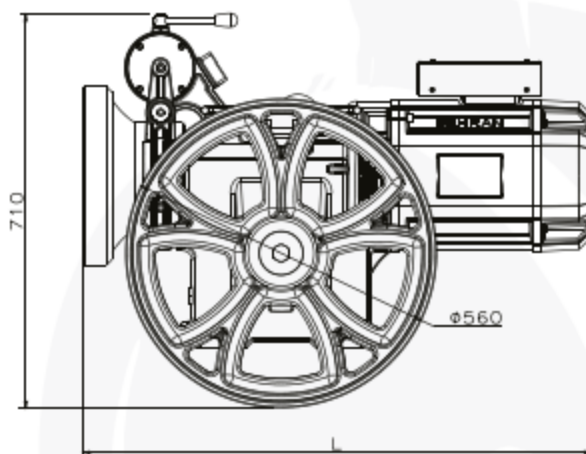

BL 260 Series

Type	Order No.	Motor Type	Power (Kw)	MOTOR SPECIFICATION											GEARBOX SPECIFICATION														
				Speed (rpm)		Current				Freq. (Hz)	Voltage (V)	Max/Normal Torque (N.m)	Poles Qty.	ED%	Max. Start Per Hour	Load (Kg)	Max. Speed (m/s)	Max. Static Load (Kg)	Traction Sheave Dia. (mm)	Undercut Angle (γ)	Groove Angle (β)	Rope Dia. (mm)	Rope Qty.	GearBox Ratio	Efficiency		Length (L)		
				low	high	low	high	low	high																low	high		MOTOR Efficiency (ηm)	GEARBOX Efficiency (ηg)
BL260	BE016173A210	AC2	7.3	310	1470	11	19	16	64	0.6	0.8	50	380	120/51	4/16	40	180	630	1	3100	560	35	103	10	5	1/44	78	80	922
	BE016173V210	VVVF	7.3	1470		15	95		0.82		50	380	104/50	4	40	240	630	1	3100	560	35	103	10	5	1/44	80	80	816	
	BE016173V316	VVVF	7.3	1470		15	95		0.82		50	380	104/50	4	40	240	450	1.6	3100	560	35	103	10	5	2/53	80	89	872	
	BE016192V316	VVVF	9.2	1470		17.6	90		0.86		50	380	101/61	4	40	240	630	1.6	3100	560	35	97	11	5	2/53	81	89	872	

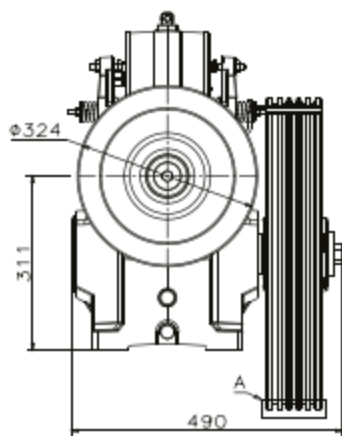

- Quiet Operation
- Heavy-Duty construction
- Extreme Reliability